



# > EUROTANK ADBLUE III COMPACT


## ✓ TECHNICAL SPECIFICATIONS

SPECIFICATIONS		SPECIFICATIONS			
Capacity	1,500 L	Features	Reinforced Roof Frame (for maintenance)		
	3,000 L		Reinforced Base Structure for easy transportation/ displacement/ instalation		
	5,000 L		Breakaway Couplings		
	10,000 L		Heating System		
Flow Rate	10 L/min (Light Vehicles)		Options	Stainless Steel Submersible Pump 0.55kw	
	40 L/min (Heavy Vehicles)			Stainless Steel Filling Pipe	
Service Door*	Side A			Overfill Valve (1)	
	Side B (2)			Corporate Image	
	Front (2)			TODO-Matic 2" Filling Connector	
Features	Level Indicator (L) (3)			Communication Protocols/ Interface	Petrotec
	Forced Ventilation with Temperature Control	EP55			
	Flexible Filling Hose	Pulse Interface			
	Guillemin 2" Filling Connector	ER3			
	Positive Displacement Meter PTF, with Pulse Generator and Integrated Electronic Calibration	IFSF IP			
	Volume/ Amount Preset	IFSF Lon v1.xx (Converter)			
	One or Two Fueling Points	IFSF Lon v2.xx			
	Power Supply 230V/50Hz	HDX 485			
	Main Distribution Electrical Board	HDX 2WI			
	High Density Polyethene Tank	DART 485			
	PVC Retention Basin (650g/m2)	Dunclare			
	Service Door	Pumalan			
	Roof Hinged Access Door				
			LEGEND: (1) Only available with Rigid Filling Hose; (2) Only available for the 3000L version; (3) Empty, Filling Point, Full.		


DIMENSIONS					
	Volume (L)	Length (mm)	Width (mm)	Height (mm)	Weight (Kg)
EUROTANK ADBLUE III COMPACT	1,500	2440	1200	2150	800
	3,000	3200	1200	2150	1000
	5,000	2900	2200	2500	1420
	10,000	4900	2200	2500	1850

Optional Dispensers\*: (+) P1000 / P1000R: + 840mm; | (+) P1000 1P2H / P1000R 1P2H: +1300mm; | (+) P5000: +1300mm.


# ✓ SERVICE DOOR LAYOUT\*

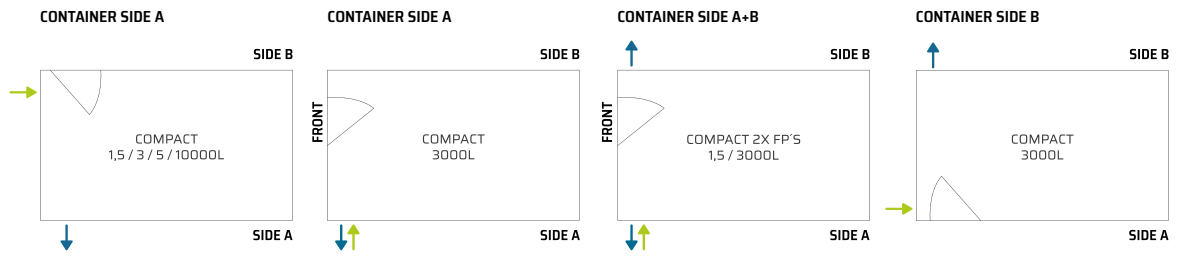

EUROTANK ADBLUE III COMPACT

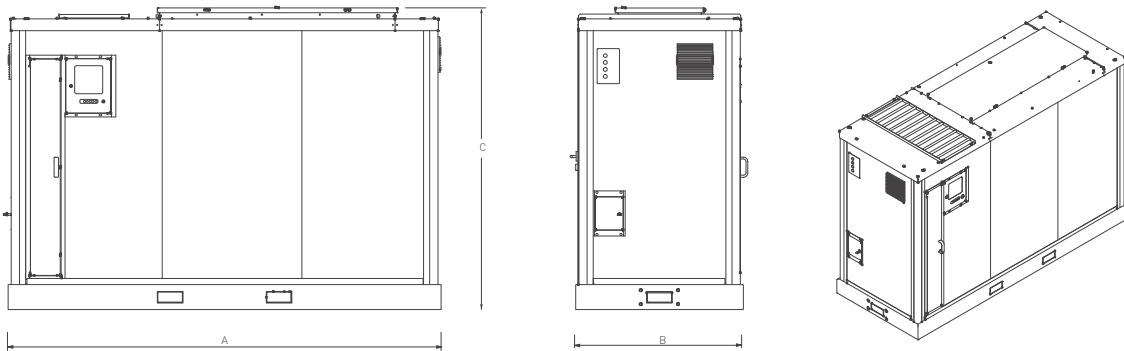

EUROTANK ADBLUE III COMPACT - 3000L - FRONT DOOR

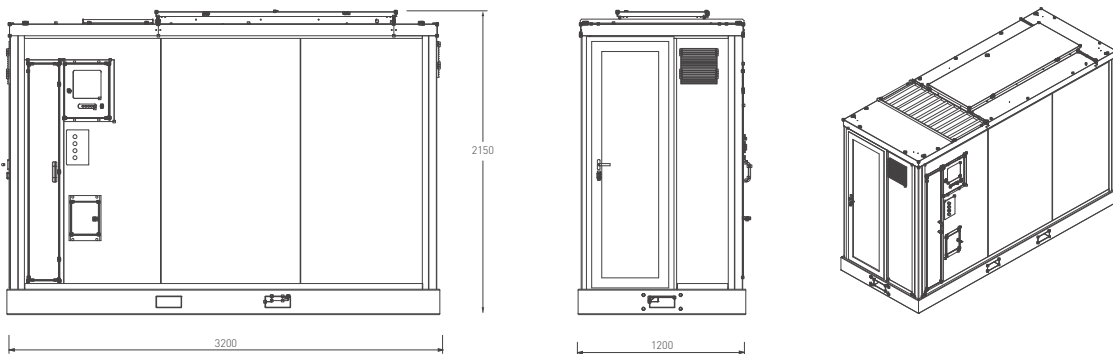

MOD. IBEUROTANKADBLUEIII/COMPACT04\_2018

© 2018 Petrotec Group | All rights reserved. Petrotec, the Petrotec logo, Progress and combinations thereof are registered trademarks of Petrotec Group. Other names are informational and may be trademarks of their respective owners. Petrotec is continuously improving its products. Changes on the specifications may occur without prior notice. The imagery used may be indicative of style only. The available brochures are a guide and do not constitute an offer or contract.

