



> EUROTANK ADBLUE III


✓ TECHNICAL SPECIFICATIONS

SPECIFICATIONS		SPECIFICATIONS	
Capacity	1,500 L	Features	Roof Hinged Access Door
	3,000 L		Reinforced Roof Frame (for maintenance)
	5,000 L		Reinforced Base Structure for easy transportation/ displacement/ installation
	10,000 L	Options	Heating System
Service Door*	Side A		Stainless Steel Submersible Pump 0.55kw
	Front (2)		Stainless Steel Filling Pipe
Features	Level Indicator (L) (3)		Overfill Valve (1)
	Forced Ventilation with Temperature Control		Corporate Image
	Flexible Filling Hose		TODO-Matic 2" Filling Connector
	Guillemin 2" Filling Connector	Optional Coupling Dispensers	P1000R AdBlue
	Main Electrical Board		P1000R wo/Heating
	Power Supply 230V/50Hz		P5000 AdBlue
	High Density Polyethylene Tank	KEY: (1) Only available with Rigid Filling Hose; (2) Only available for the 3000L version; (3) Empty, Filling Point, Full.	
	PVC Retention Basin (650g/m2)		
	Service Door		

DIMENSIONS					
	Volume (L)	Length (mm)	Width (mm)	Height (mm)	Weight (Kg)
EUROTANK ADBLUE III	1,500	1700 (*)	1200	2150	800
	3,000	3100 (*)	1200	2150	1000
	5,000	2800 (*)	2200	2500	1420
	10,000	4800 (*)	2200	2500	1850


Optional Dispensers*:
 (+) P1000 / P1000R: + 840mm;
 (+) P1000 1P2H / P1000R 1P2H: +1300mm;
 (+) P5000: +1300mm.

✓ SERVICE DOOR LAYOUT*

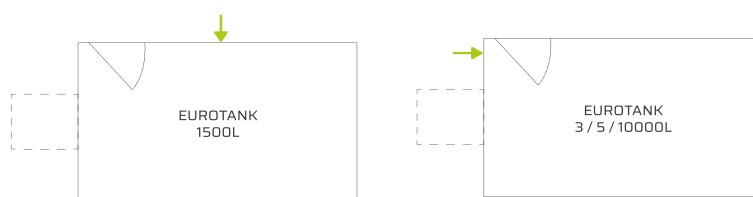


KEY: → Loading Connection.

EUROTANK ADBLUE III + P1000R ADBLUE

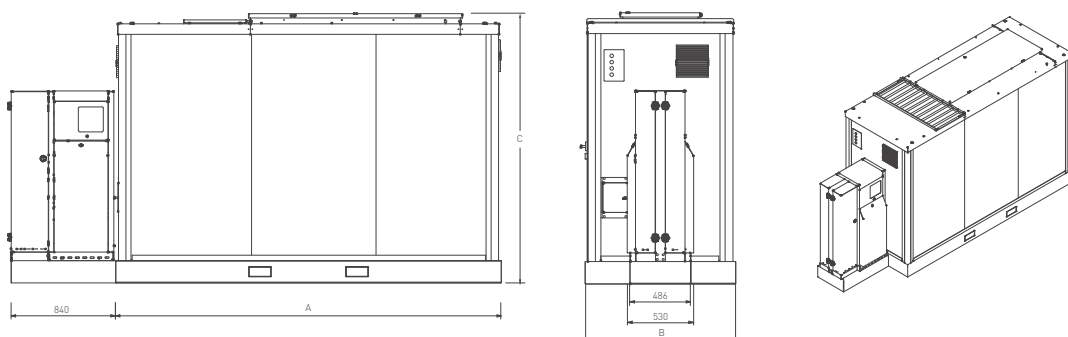

EUROTANK ADBLUE III + P5000 ADBLUE 1P

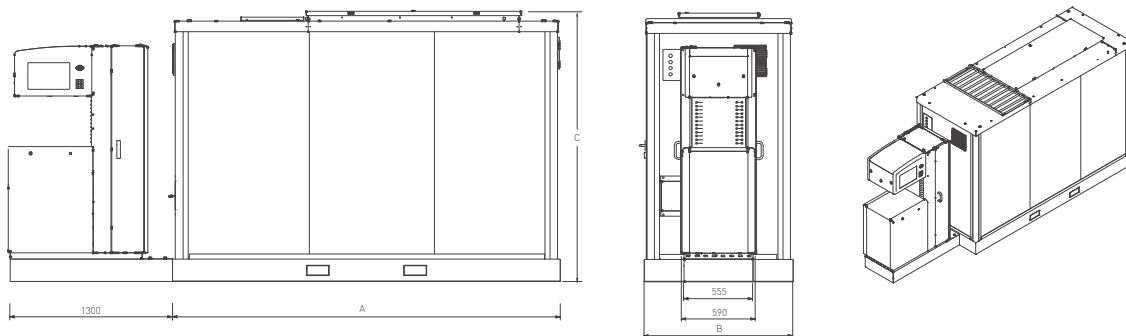

MOD. IBEUROTANKADBLUEIII 04_2018

© 2018 Petrotec Group | All rights reserved. Petrotec, the Petrotec logo, Progress and combinations thereof are registered trademarks of Petrotec Group. Other names are informational and may be trademarks of their respective owners. Petrotec is continuously improving its products. Changes on the specifications may occur without prior notice. The imagery used may be indicative of style only. The available brochures are a guide and do not constitute an offer or contract.

